





5. TB2 Assignment

Pin Model	1	2	3	4	5	6	7	8	Pin Model	1	2	3	4	5	6
SNP-9541	+12V	+5V	+5V	GND	GND	-12V			SNP-9546	+5V	+5V	+5V	GND	GND	GND
SNP-9542	+12V	+5V	+5V	GND	GND	-5V			SNP-9547	+12V	+12V	+12V	GND	GND	GND
SNP-9543	+12V	GND	GND	+5V					SNP-9548	+15V	+15V	+15V	GND	GND	GND
SNP-9543-H	+3.3V	+3.3V	GND	GND	GND	GND	+5V	+5V	SNP-9549	+24V	+24V	+24V	GND	GND	GND
SNP-9544	+15V	+5V	+5V	GND	GND	-15V									

Output Specifications:


MODEL NO.	OUTPUT RAIL	LOAD			VOLTAGE ACCURACY	RIPPLE NOISE	LINE REG.	LOAD REG.
		MIN.	RATED	PEAK				
SNP-9541	+5V	0A	3A	6A	+4.95V~+5.05V	50mV	±1%	±3%
	+12V	0A	2A	4A	+11.4V~+12.6V	120mV	±2%	±3%
	-12V	0A	0.3A	0.5A	-11.4V~-12.6V	120mV	±3%	±5%
SNP-9542	+5V	0A	3A	6A	+4.95V~+5.05V	50mV	±1%	±1%
	+12V	0A	2A	4A	+11.4V~+12.6V	100mV	±2%	±3%
	-5V	0A	0.3A	0.5A	-4.75V~-5.25V	100mV	±3%	±5%
SNP-9543	+5V	0A	3A		+4.95V~+5.05V	50mV	±1%	±1%
	+12V	0A	2A	5.5A	+11.4V~+12.6V	120mV	±1%	±4%
SNP-9543-H	+5V	0A	5A	8A	+4.95V~+5.05V	50mV	±1%	±1%
	+3.3V	0A	4A	8A	+3.14V~+3.47V	50mV	±1%	±1%
SNP-9544	+5V	0A	3A	5A	+4.95V~+5.05V	50mV	±1%	±1%
	+15V	0A	1.5A	3A	+14.25V~+15.75V	150mV	±1%	±3%
	-15V	0A	0.3A	0.5A	-14.25V~-15.75V	150mV	±1%	±3%
SNP-9546	+5V	0A	8A	12A	+4.75V~+5.25V	50mV	±1%	±1%
SNP-9547	+12V	0A	3.3A	5A	+11.9V~+12.1V	100mV	±1%	±1%
SNP-9548	+15V	0A	2.6A	4A	+14.85V~+15.15V	100mV	±1%	±1%
SNP-9549	+24V	0A	1.7A	2.5A	+23.8V~+24.2V	240mV	±1%	±1%

Note:


- Each output can provide up to peak load temporarily. Continuous staying in more than rated load is not allowed.
- At factory, all outputs in 60% rated load condition, each output is checked to be within the accuracy range while the main output is setting to within the specified accuracy range at rated load.
- Line regulation is defined by changing ±10% of input voltage from nominal line at rated load.
- Load regulation is defined by changing ±40% of measured output load from 60% rated load at another output set to 60% rated load.
- Ripple & noise is measured by using 15MHz bandwidth limited oscilloscope and terminated each output with a 0.47uF capacitor at rated load and nominal line.
- Hold up time is measured from the end of the last charging pulse to the time which the main output drop down to regulation limit at rated load and nominal line.
- Rated load is maximum loading for flat mounting and free air convection cooling.

**Performance for SNP-9541:**


1. Switching frequency ripple

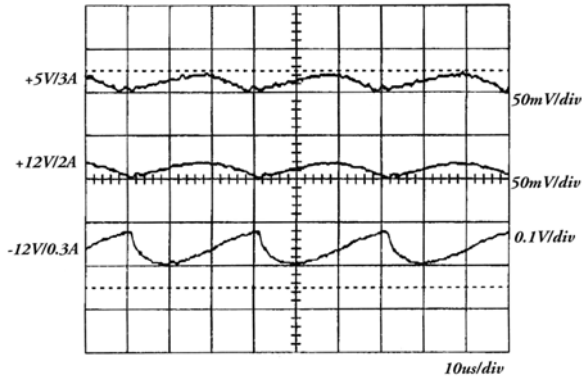


2. Line frequency ripple

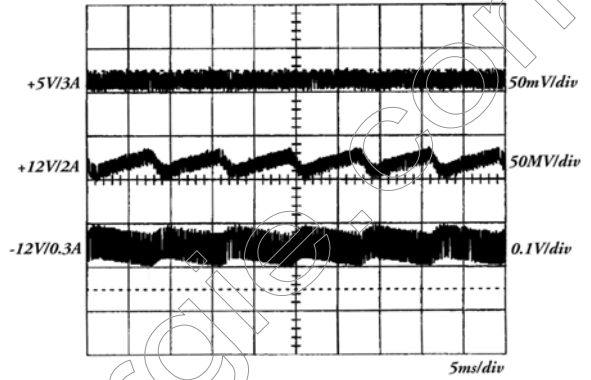


3. Output turn on wave form

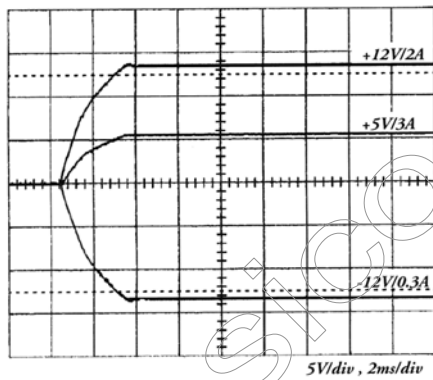


4. Output turn off wave form

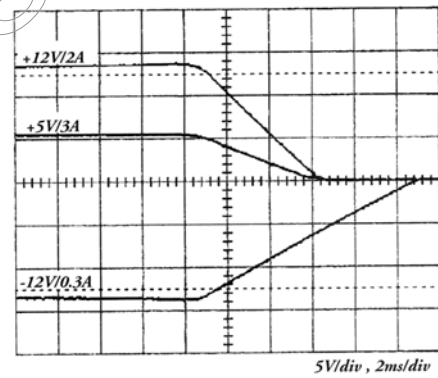

5. Hold-up time

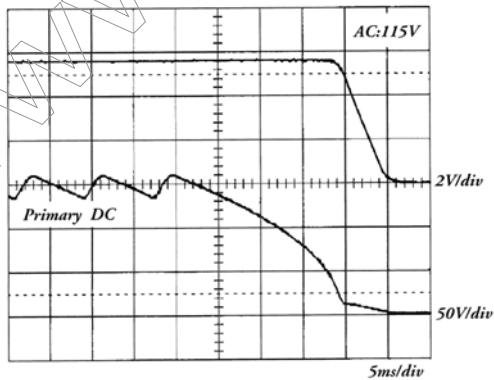


6. Over voltage protection

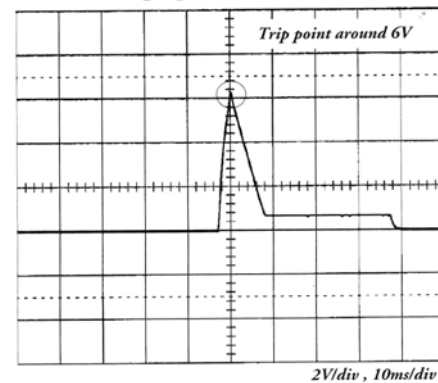





7. + 5V step response

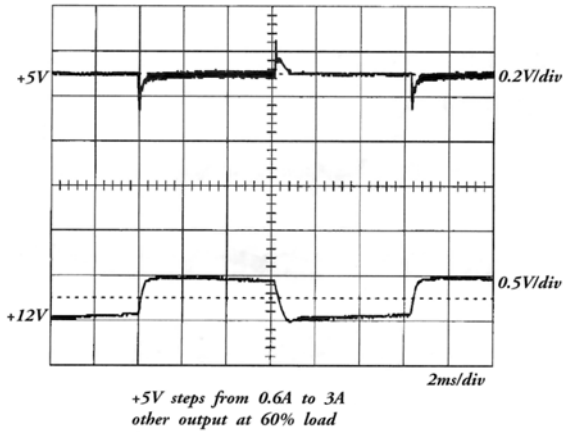

8. + 12V step response

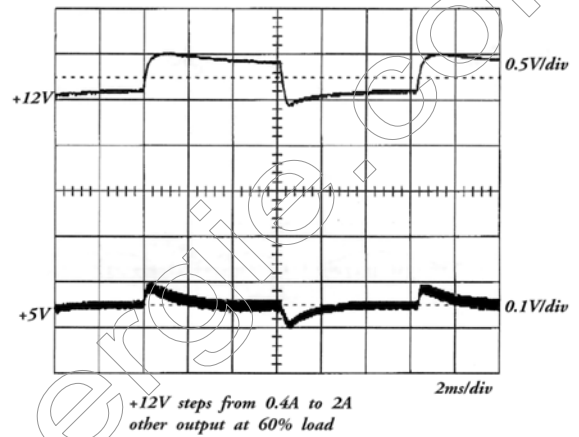

9. FCC B performance

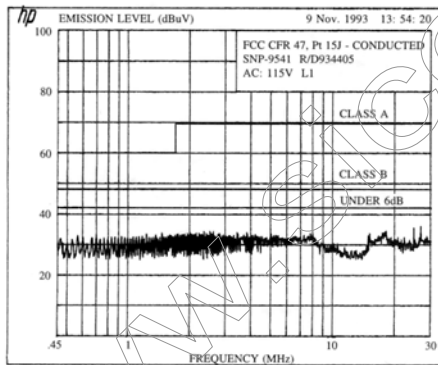

10. Vfg 243 performance

