



Features :

- . Low cost, High reliability
- . 105°C output capacitor
- . International AC input range
- . High efficiency, Low working temperature
- . Soft-start circuit, Limiting AC surge current
- . Short circuit, Overload protected
- . Compact size, Light weight
- . 100% full load burn-in test
- . Built in EMI filter, Low ripple noise


. ISO 9001 certified manufacturer



SPECIFICATION	D-30A		D-30B	
	CH1	CH2	CH1	CH2
DC OUTPUT VOLTAGE	5V	12V	5V	24V
OUTPUT V. TOLERANCE	±2%	+3,-7%	±2%	+3,-5%
OUTPUT RATED CURRENT	4A	1A	2.2A	1A
OUTPUT CURRENT RANGE	0.5-4A	0.1-1A	0.5-4A	0.1-1A
RIPPLE & NOISE	50mVp-p	100mVp-p	50mVp-p	100mVp-p
LINE REGULATION	±0.5%	±1%	±0.5%	±1%
LOAD REGULATION	±0.5%	±4%	±0.5%	±4%
DC OUTPUT POWER	32W		35W	
EFFICIENCY	72%		74%	
DC VOLTAGE ADJ.	CH1:+10,-5%		CH1:+10,-5%	
INPUT VOLTAGE RANGE	85~132VAC / 170~264VAC SELECTED BY SWITCH 47~63Hz, 240~370VDC			
AC CURRENT	0.8A/115V 0.45A/230V			
INRUSH CURRENT	COLD START 18A/115V 36A/230V			
LEAKAGE CURRENT	<0.5mA/240VAC			
OVERLOAD PROTECTION	105%~150% TYPE:FOLDBACK CURRENT LIMITING RESET-AUTO RECOVERY			
OVER VOLTAGE PROTECTION	-----			
OVER TEMP. PROTECTION	-----			
TEMP. COEFFICIENT	±0.03% / °C (0~50°C) ON +5V OUTPUT			
SETUP, RISE, HOLD UP TIME	200ms, 50ms, 30ms			
VIBRATION	10~500Hz, 2G 10min./1cycle, PERIOD FOR 60min. EACH AXES			
WITHSTAND VOLTAGE	I/P-O/P:1.5KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC			
ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:500VDC / 100M Ohms			
WORKING TEMP., HUMIDITY	-10°C~+60°C(REFER TO OUTPUT DERATING CURVE), 20%~90% RH			
STORAGE TEMP., HUMIDITY	-20°C~+85°C, 10%~95% RH			
DIMENSION	129*98*38mm CASE:903			
WEIGHT	0.4Kgs			
SAFETY STANDARDS	MEET UL1012 REQUIREMENT (NOT APPLY FOR THE MARK)			
EMC STANDARDS	MEET FCC PART15 J CONDUCTION CLASS A			
NOTE	1.ALL PARAMETERS ARE SPECIFIED AT 230VAC INPUT, RATED LOAD, 25°C 70% RH. AMBIENT. 2.TOLERANCE INCLUDE SET UP TOLERANCE, LINE REGULATION, LOAD REGULATION. 3.RIPPLE & NOISE ARE MEASURED AT 20MHz BY USING A 12" TWISTED PAIR TERMINATED WITH A 0.1uF & 47uF CAPACITOR. 4.LINE REGULATION IS MEASURED FROM LOW LINE TO HIGH LINE AT RATED LOAD. 5.LOAD REGULATION IS MEASURED FROM 20% TO 100% RATED LOAD, AND OTHER OUTPUT AT 60% RATED LOAD. 6.EACH OUTPUT PROVIDE UP TO MAXIMUM CURRENT, BUT TOTAL LOAD CAN NOT EXCEED MAX. OUTPUT POWER.			




BLOCK DIAGRAM

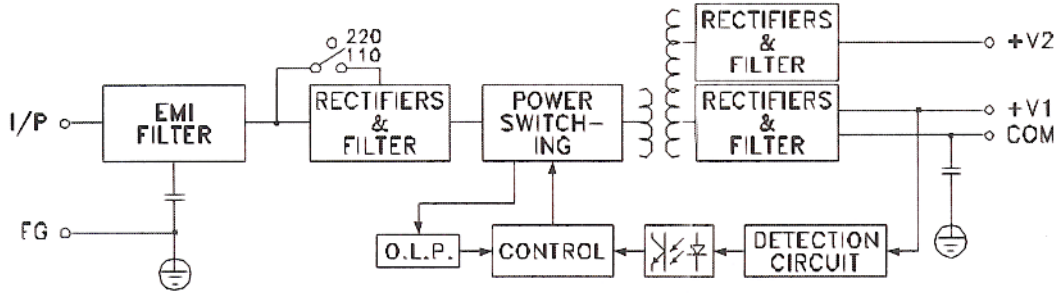


fosc : 23KHz I/P-O/P:RATED

OUTPUT DERATING

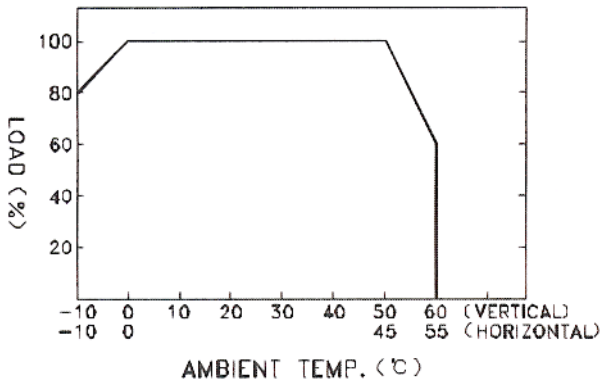

STATIC CHARACTERISTICS

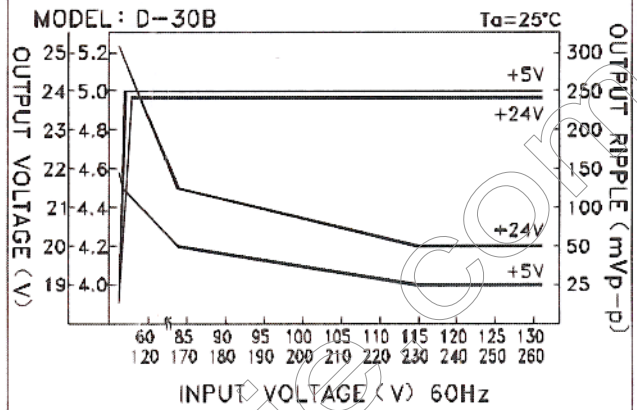

DIMENSION (mm)

- ☒ CASE : 903
- ☒ TERMINAL PIN NO. ASSIGNMENT
 - ☒ PIN 1,2 : AC INPUT
 - ☒ PIN 3 : FG
 - ☒ PIN 4 : DC OUTPUT COM
 - ☒ PIN 5 : DC OUTPUT +V2
 - ☒ PIN 6 : DC OUTPUT COM
 - ☒ PIN 7 : DC OUTPUT +V1

