



Features :

- . Three-phase AC 340~550 V wide range input
- . High efficiency 91% and low dissipation
- . Protections : short circuit, over load, over voltage over temperature
- . Cooling by free air convection
- . Can be installed on DIN rail TS-35/7.5 or 15
- . UL508 (industrial control equipment) approved
- . EN61000-6-2 (EN50082-2) industrial immunity level
- . 100% full load burn-in test

.3 years warranty




Model	DRT-960-24		DRT-960-48
OUTPUT	DC VOLTAGE	24V	48V
	RATED CURRENT	40A	20A
	CURRENT RANGE	0~40A	0~20A
	RATED POWER	960W	960W
	RIPPLE& NOISE (max.)	80mVp-p	80mVp-p
	VOLTAGE ADJ. RANGE	24~28V	48~55V
	VOLTAGE TOLERANCE	+1.0%	+1.0%
	LINE REGULATION	+0.5%	+0.5%
	LOAD REGULATION	+0.5%	+0.5%
	SETUP, RISE, HOLD TIME	200ms, 60ms, 10ms/400 VAC 200ms, 60ms, 24ms/500 VAC at full load	
INPUT	VOLTAGE RANGE	Three-phase 340~550 VAC	480~780 VDC
	FREQUENCY RANGE	47~63Hz	
	EFFICIENCY (Typ.)	91%	
	AC CURRENT	2.4A/400 VAC	1.9 A/500 VAC
	INRUSH CURRENT	Cold start 50A	
LEAKAGE CURRENT	<3.5mA / 530 VAC		
PROTECTION	OVER LOAD	105~125% rated output power Protection type : Constant current limiting, unit will shut down o/p voltage after 3sec., re-power on to recover	
	OVER VOLTAGE	30~36V	59~66V
	OVER TEMPERATURE	100°C ±5°C (TSW1) Detect on heatsink of power transistor 85°C +5°C (TSW2) Detect on heatsink of power diode Protection type : Shut down o/p voltage, recovers automatically after temperature goes down	
ENVIRONMENT	WORKING TEMP.	-20~+60°C (Refer to output load derating curve)	
	WORKING HUMIDITY	20~90% R.H, non-condensing	
	STORAGE TEMP., HUMID.	-40~+85°C, 10~95% R.H.	
	TEMP. COEFFICIENT	±0.03% / °C (0~50°C)	
	VIBRATION	Components : 10~500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes. Mounting : compliance to IEC60068-2-6	
SAFETY & EMC	SAFETY STANDARDS	UL508, TUV EN60950-1 approved	
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC	
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG; O/P-FG:100M Ohms/500VDC	
	EMI CONDUCT. ° & RAD. °	Compliance to EN55011 (CISPR11), EN55022 (CISPR22), EN61204-3 Class B	
	HARMONIC CURRENT	Compliance to EN61000-3-2, -3	
OTHERS	EMS IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11, ENV50204, EN61204-3, EN61000-6-2 (EN50082-2) Heavy industry level, criteria A	
	MTBF	122.5Khrs min. MIL-HDBK-217F (25°C)	
	DIMENSIONS	276 x 125.2 x 100mm (W x H x D)	
PACKING	3.3Kg, 4pcs/14.2Kg / 1.14CUFT		
NOTE	<ol style="list-style-type: none"> 1. All parameters NOT specially mentioned are measured at 400VAC input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1µF & 47µF parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. 		



■ Mechanical Specification

Case No 934 Unit:mm

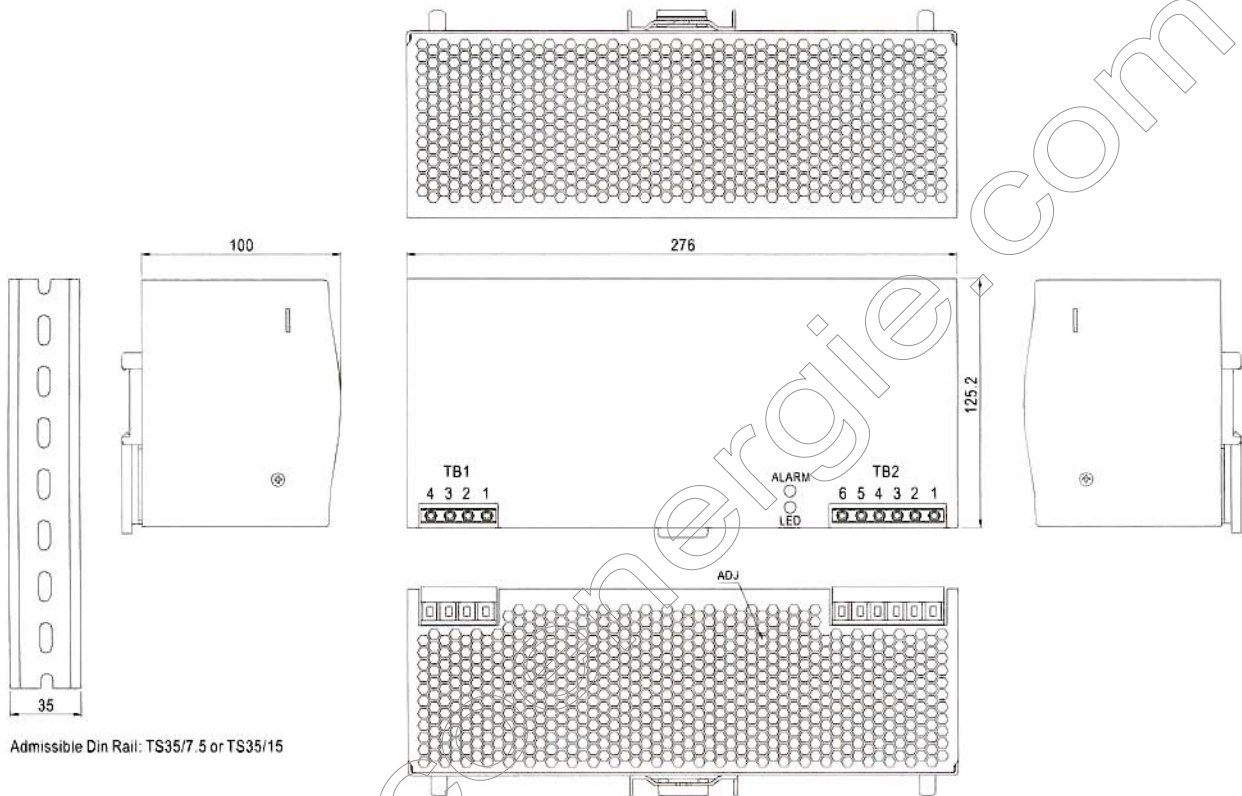


TB1 Terminal Pin. No Assignment

Pin No.	Assignment
1	AC/L1
2	AC/L2
3	AC/L3
4	FG

TB2 Terminal Pin. No Assignment

Pin No.	Assignment
1,2,3	DC OUTPUT +V
4,5,6	DC OUTPUT -V

■ Derating Curve

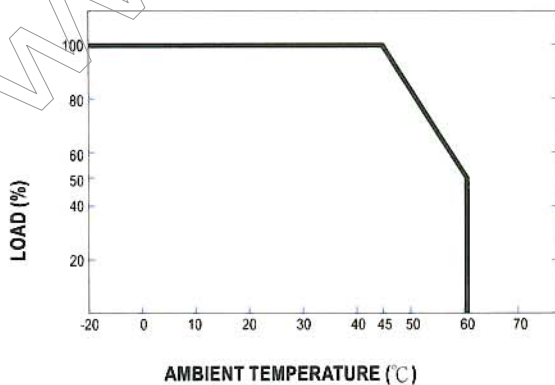

■ Static Characteristics

